

BUILT TOUGH TO HANDLE ANY JOB



**GRANBY INDUSTRIES' LIGHT COMMERCIAL TANKS
ARE ROBUST AND DURABLE; TWO ESSENTIAL
FEATURES REQUIRED FOR YOUR STORAGE NEEDS.**



Single wall tank:



Double wall tank with vacuum monitoring:



Double bottom tank with visual monitoring:



Granby Storage Tanks offers a complete range of aboveground light commercial tanks ranging in sizes from 570 L (125 IMP) to 4 550 L (1 000 IMP). Thanks to its 63+ years of engineering and manufacturing experience, when you choose Granby Storage Tanks for your fuel storage needs, you choose reliability, durability and peace of mind.

Light Commercial Tanks: single wall, double wall, double bottom

VOLUME (L, GAL.)	TANK WEIGHT (Lb, Kg)	NOMINAL STEEL THK.	A	B	C	F	G	H	K	L
570,125	200,91	2.5 mm	49		30 ^{1/4}	39	0		12	18
1135,250	290,132	2.5 mm	60		38 ^{1/4}	47	0		15	21
1360,300	340,155	2.5 mm	72		38 ^{1/4}	47	0		15	21
1915,420	405,184	2.5 mm	60		50 ^{1/4}	59	0		15	21
2275,500	460,209	2.5 mm	72		50 ^{1/4}	59	0		15	21
3800,835	690,313	2.5 mm	120	25	50 ^{1/4}	59	25	50	15	21
4550,1000	795,360	2.5 mm	142	25	50 ^{1/4}	59	25	50	15	21

Technical specifications : ASTM A-1011 steel, NPT female threaded openings, pressure tested at 5 PSIG, for use at atmospheric pressure only. Each double wall and double bottom tank is vacuum tested. All our tanks are tested and labeled in accordance with ULC-S601 standard for flammable and combustible liquids.

EXTERNAL FINISH

- Phosphate washed ; grey enamel painted
- Phosphate washed ; light grey or white, two-component polyurethane, UV-resistant paint
- 10 PLUS : sandblasted ; beige two-component polyurethane coating with top coat offering UV protection

DOUBLE WALL MODEL

DOUBLE WALL WITH VACUUM MONITORING SYSTEM



- 300-degree wrap for secondary wall

DOUBLE BOTTOM MODEL


DOUBLE BOTTOM WITH VISUAL LEAK DETECTION SYSTEM

- Double bottom tank with visual leak detection system which indicates any leakage in the tanks' inner layer.

ADDITIONAL OPTION

Spill Box (removable) - Overfill Vent Alarm

Level Gauge - Fill and Vent Caps

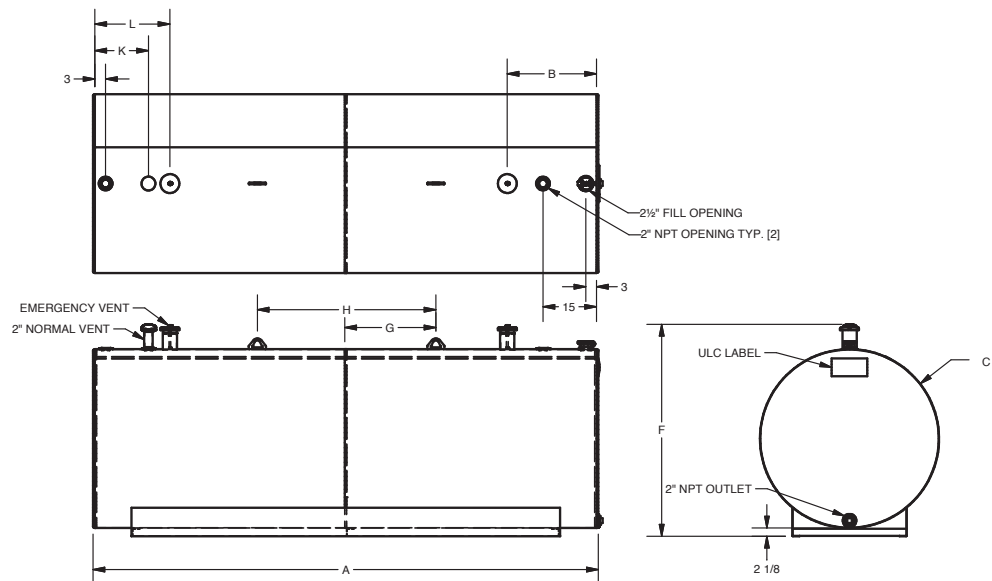

Up to 10-year warranty
against manufacturing defects *

10PLUS

POLYURETHANE COATING
10-YEAR WARRANTY

10-year warranty against
perforation from external
corrosion *

* Please refer to Warranty Certificate for details.