

computrol | Fleet



Prevent the misuse or theft of fuel or liquids



Long-lasting, weather and vandal resistant cabinet



Record accurate data of your fuel or liquids usage




Easily share transaction data with other systems



Capture useful additional data with each transaction



Communicate remotely via Serial or Network



Quick and easy configuration uploads and data downloads by USB flashdrive



**AFFORDABLE
VERSATILE
DURABLE**



TEL: +1-604-421-1001
TOLL-FREE: 1-877-421-1001
INFO@COMPUTROLFUEL.COM
WWW.COMPUTROLFUEL.COM

Fleet Key Features

- Use ProFuel 2 to configure and manage the Fleet
- Fleet is compatible with most pumps used for fuel and liquids dispensing
- Fully configurable parameters for all pulser ratios and safety timers
- Restrict access to fuel by time with programmable in-service hours
- Easy-to-read screen with high visibility in all light-levels
- Both weather and vandal resistant, thanks to a rugged, corrosion resistant, aluminium cabinet
- Can operate year-round and in extreme weather conditions
- Provides convenient management and easy configuration through its on-screen menu
- Multiple units (litres, gallons, kilos or cubes) provide accurate measurements for different liquid types and locations


Specifications

- Dimensions: H 35.5 cm (14") W 33 cm (13") D 35.5 cm (14")
- Weight: 8 kg (18 lbs)
- Electrical: 120/230 VAC, 50/60Hz
- CSA inspected
- Output type: dry contact
- Temperature: -40°C (-40°F) to 50°C (122°F)
- Humidity: 5% to 95% non-condensing

Up and Running Fast

- Start using the Fleet immediately. Same day installation and testing
- Factory configured with the most common settings for immediate use upon installation
- All display prompts and error messages pre-initialized
- All parameters verified and tested by factory technicians

A Complete Management System

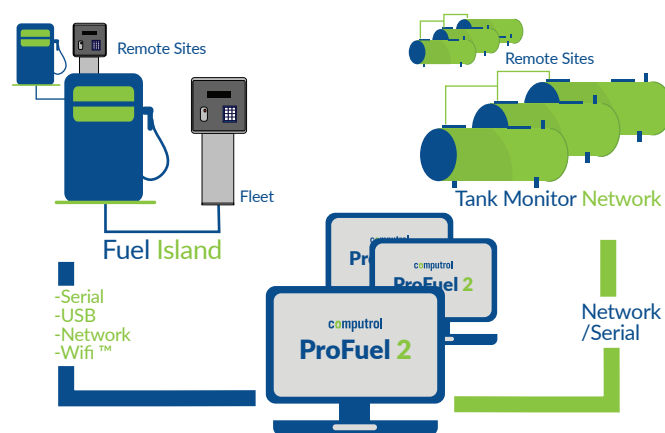

Management Software for Fleet 220/240 Only

FEATURES	Fleet-200	Fleet-220	Fleet-240
Hose Capacity	2 (4 optional)	2 (4 optional)	2 (4 optional)
Code Capacity	50	200	400
Transaction Capacity	2,000	2,000	2,000
2 'Card' System (Driver/Vehicle)	✓	✓	✓
Misc. Inputs (Free Data Field)	1	2	2
Product Restriction	✓	✓	✓
Stainless Steel Keypad	✓	✓	✓
RFID Proximity Reader	Optional	Optional	Optional
Computrol Coil Card Reader	✗	✗	Optional
On-Screen Menu System	✓	✓	✓
ProFuel 2 Compatibility	No	Required	Required
Communications port	RS-232, USB	RS-232, USB, Network	RS-232, USB, Network
USB Flashdrive/Backup	✓	✓	✓
Audit Printer Support	✗	✓	✓
Programmable Prompts	✓	✓	✓
Unauthorized Access Logging	✗	✓	✓
Pre-select Volume Dispensing	✗	✗	✓
Transaction Limits	✓	✓	✓
Polling Limits	✓	✓	✓
Daily Limits	✗	✗	✓